


1. WIRES TO BE:  
CABLE LENGTH OF 18".  
IF CABLE IS SHIELDED THE DRAIN MUST BE CONNECTED AT METER.
2. 75mA MAXIMUM CURRENT.
3. FOR EARLIER PRODUCTION METERS, BLUE WIRE WAS CONNECTED FROM PDS. 5 TO PDS. 6 AT THE CONNECTOR
4. FIRMWARE WITH BUILT-IN TEST INSTALLED BEGINNING WITH MODEL HSD 1286, BEGINNING 9/05.

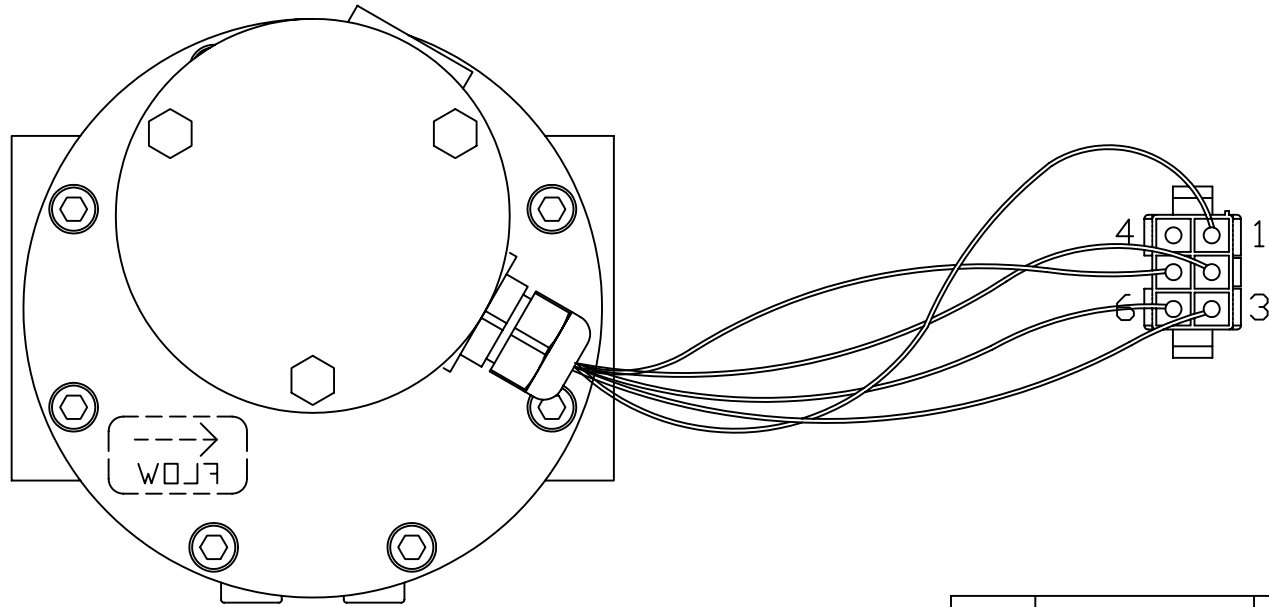

STATION	FUNCTION	COLOR
1	B PULSE	GREEN
2	A PULSE	WHITE
3	+5 VDC	RED
4	EMPTY	NONE
5	CONNECTION VERIFICATION	BLUE
6	COMMON GROUND	BLACK W/ SHIELD

BENNETT PART NO. 108948